






# No Sound Series

# 1770 NS



### Certified for:

-  Sound insulation  
**43 dB**
-  Fire resistance:  
**60 min.**
-  Usage cycles  
**200.000 cycles**

### Protects from:

-  Air
-  Water
-  Light
-  Insects

 Not an obstacle for disabled persons

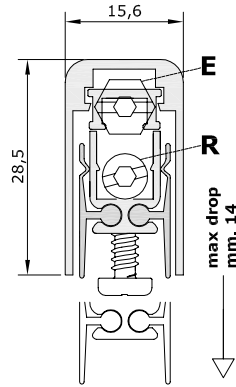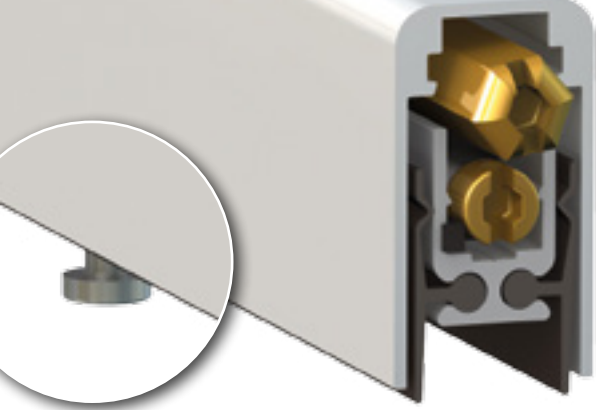

## STANDARD ACCESSORIES




Standard measurements (mm)	530	630	730	830	930	1030	1130	1230	1330
Max shortening (mm)	100	100	100	100	100	100	100	100	100

## FASTENING SYSTEMS

### STANDARD



## MAIN APPLICATIONS

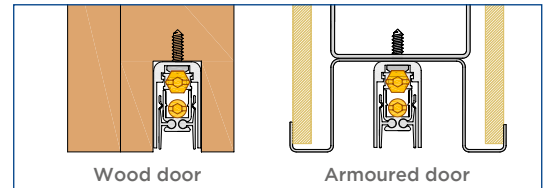

• **FEATURES** Mechanism (PATENTED) with the parallel descent of the moving profile with gasket, characterised by the DUAL ADJUSTMENT (screw E: descent - screw R: incline) for a strong even pressure on the entire length.

• **COMPONENTS** Extruded profiles in aluminium alloy 6060 - dual high performance silicone lamellar gasket - elements printed in self-lubricating nylon + nylon reinforced with 30% glass fibre - threaded rods in burnished iron - 7 mm hexagonal button and Ø 6 mm brass bushing - coil springs in treated stainless steel - self-drilling 3.5 x 25mm screws.

### • VARIATIONS ON REQUEST

**Button:** round nylon, square nylon, bevelled nylon.  
**Screws:** particleboard 3.5 x 25 mm.

STANDARD PACKAGING	OPTIONAL PACKAGING
Cardboard box with 28 pcs + 28 standard accessory packs	Cardboard box with 15 polyethylene bags with 1 pc + 1 standard accessory pack + assembly instructions

## OPTIONAL ACCESSORIES

### Nylon plate



CA101 on smooth frame



CA104 on smooth frame



### Insulating nylon plate with silicon gasket



PI002 on smooth frame



PI002 on smooth frame

